

evo<sup>2</sup>




**CONSTANT EXTRACTION** Separated steam boiler and brewing group with our patented multi boiler technology. Set temperature with 0,1 degree precision and find your sweet spot.

**USABILITY** 54 mm-diameter portafilter, ergonomic handgrips, easy and quick milk frothing. Possibility to use the machine with dc system modules (GCS, MCS, OCS).

**ENERGY SAVING** Independent group give the possibility to turn off unused brewing groups or the boiler. All the material of evo2 guarantee the perfect thermal stability.

**SUSTAINABILITY** Lead Free: all parts exposed to water are in lead-free alloy (CW510L), certified by NSF. Construction materials are totally recyclable.

**BLACKBOARD EDITION** Make it your own. Customize your machine and add a personal touch on it. Let's play, write, erase and keep on creating.

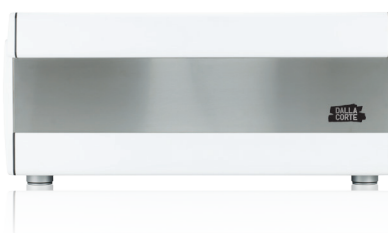

#### 4 GROUPS

dimensions (w x h x d)	1150 x 510 x 525 mm
weight	100 kg
power consumption (24h-stand-by)	13,0 kW
max power	6,0 kW
connected load	400 V 3 N
boiler capacity	13 l
capacity of group heads	0,5 l

**DALLA  
CORTE**  
*Make it  
Better*



**ARCTIC WHITE**

4 groups

1-MC-EVODUE-4-W-400



**SPARKLING RED**

4 groups

1-MC-EVODUE-4-R-400



**NEBULA BLACK**

4 groups

1-MC-EVODUE-4-N-400



**QUARTZ GREY**

4 groups

1-MC-EVODUE-4-Q-400



**BLACKBOARD**

4 groups

1-MC-EVODUE-4-C-400

**GCS** Grinder Control System - connection with dc one or dc two grinder  
**MCS** Milk Control System - requires a specific steam wand  
**OCS** Online Control system - remote control with LAN module and connection cable